


### FEATURES

- Armstrong provides one-source responsibility for the generator system and its accessories.
- All units and components are factory tested during prototype and manufacturing stages assuring long product life.
- Generator set accepts one-step 100% of full load per NFPA 110.
- A **one-year limited warranty** covers all systems and components. Extended warranties are available.
- Rugged 4 cycle heavy-duty diesel engine, with swirl intake ports for a low fuel consumption and excellent transient response.

#### Generator features:

- Unique Volts per Hertz compensated electronic AVR excitation system delivers reliable voltage response for in rush loads.
- Brushless, rotating-field generator has low reactance, 2/3 pitch, class H insulation, minimizes voltage distortion when powering non-linear loads.

### TIER II SERIES

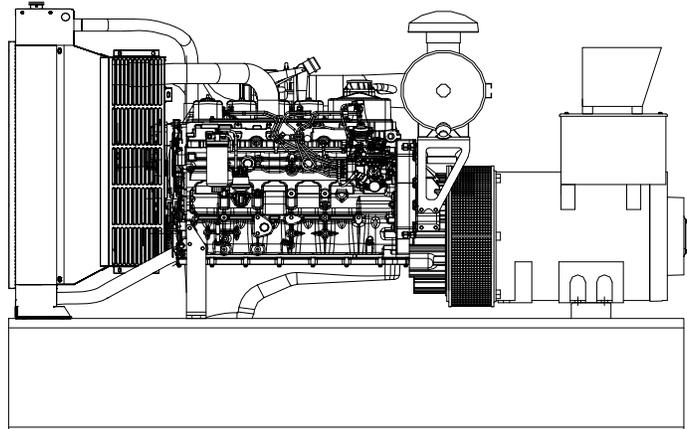

#### More features:

- Controllers are available to meet your most demanding applications.
- In the event of low oil pressure or high coolant temperature the self-protecting system will automatically stop the engine.

## GENERATOR SET RATINGS

Model	Volt Code	Voltage	Winding Connection	Phase	Power Factor	Hz	Amps Standby	Standby kW / kVA	Prime kW / kVA
A550PE2	61	480 / 277	HI WYE	3	0.8	60	828	550 (688)	-
A550PE2	62	460 / 266	HI WYE	3	0.8	60	864	550 (688)	-
A550PE2	63	440 / 254	HI WYE	3	0.8	60	903	550 (688)	-
A550PE2	64	240 / 139	LOW WYE	3	0.8	60	1656	550 (688)	-
A550PE2	65	220 / 127	LOW WYE	3	0.8	60	1806	550 (688)	-
A550PE2	66	208 / 120	LOW WYE	3	0.8	60	1911	550 (688)	-
A550PE2	67	240 / 120	2 DELTA	1	1.0	60	2292	550 (688)	-
A550PE2	51	415 / 240	HI WYE	3	0.8	50	-	-	-
A550PE2	53	380 / 220	HI WYE	3	0.8	50	-	-	-
A550PE2	55	220 / 127	LOW WYE	3	0.8	50	-	-	-
A550PE2	57	220 / 110	2 DELTA	1	1.0	50	-	-	-

Stand-By ratings are continuous electrical service during the interruption of normal power. No overload capacity is specified at these ratings. Prime ratings available with variable loads are continuous, 10% overload capacity for one hour in twelve hours periods.

Both ratings per BS 5514, DIN 6271, ISO-3046

Many industrial, commercial and residential voltages are available

## ALTERNATOR ESPECIFICATIONS

# A550PE2

<b>Type</b>	<b>Four pole, revolving field</b>
<b>Rotor Insulation</b>	<b>Class H</b>
<b>7Temperature Rise</b>	<b>150°C Standby</b>
<b>Material</b>	<b>Epoxy resin</b>
<b>Line-To-Line Harmonic Factor (Max)</b>	<b>5%</b>
<b>Telephone Interference Factor (Tif)</b>	<b>1%</b>
<b>Voltage Regulator</b>	<b>Solid State</b>
<b>Cooling</b>	<b>Self-ventilated and drip proof</b>
<b>Bearing</b>	<b>1 each, pre-lubed</b>
<b>Coupling</b>	<b>Direct, Flexible Disc</b>
<b>Load Capacity (Standby)</b>	<b>100%</b>
<b>Overload Capacity (Prime)</b>	<b>110%</b>
<b>Voltage Regulation</b>	
<b>No Load To Full Load</b>	<b>±1 %</b>
<b>One Step Load Acceptance</b>	
<b>Per NFPA 110</b>	<b>100%</b>

- ❑ Four pole, revolving field, direct coupled to engine flywheel, provides excellent alignment.
- ❑ Insulation is of class H, ready to be used on harsh environments where sea spray, sand and chemical corrosion are existing factors.
- ❑ Voltage regulator provides Volts/Hertz compensation to improve the motor starting capabilities, therefore support the engine handling transient loads.
- ❑ Dynamically balanced rotor, with damper winding, help dissipate transient voltage interference during load variations.
- ❑ The windings have a 2/3 pitch in order to reduce the harmonic content of voltage.
- ❑ Robust mechanical structure permits easy access to connections.

## ENGINE ESPECIFICATIONS

<b>Manufacturer</b>	<b>PERKINS</b>
<b>Model</b>	<b>2506C-E15TAG4</b>
<b>Bore</b>	<b>5.39 in (137mm)</b>
<b>Stroke</b>	<b>6.73 in (171mm)</b>
<b>Number Of Cylinders</b>	<b>6</b>
<b>Piston Displacement</b>	<b>927.5 in3 (15.2L)</b>
<b>Compression Ratio</b>	<b>16.0:1</b>
<b>Cooling System Type</b>	<b>Liquid</b>
<b>Engine Type</b>	<b>In-Line – 4 Cycle</b>
<b>Aspiration</b>	<b>Turbocharged after cooled</b>
<b>Engine Crankcase Vent System</b>	<b>Closed</b>
<b>Cylinder</b>	<b>Replaceable Liner</b>
<b>EPA Tier</b>	<b>2</b>
<b>Governor Type</b>	<b>Electronic</b>
<b>Frequency Regulation</b>	
<b>No Load To Full Load</b>	<b>0.25 %</b>
<b>Air Cleaner</b>	<b>Dry Element</b>

- ❑ Robust industrial grade PERKINS diesel engine, for reliable endurance.
- ❑ Direct fuel injection system and swirl intake ports combine for a low fuel consumption and excellent transient response.
- ❑ Cylinder Head provides superior airflow through specially designed intake manifold ports, large valves and seats resulting in superior engine performance in torque reserve, fuel consumption and emissions. .
- ❑ Dynamically Balanced Crankshaft, with induction-hardened journal surfaces significantly increases wear life.
- ❑ Belt Fan Drive provides superior noise and vibration reduction.

Powered by : **Perkins**

## STANDARD EQUIPMENT

### ENGINE

- Air Cleaner
- Fuel Pump
- Fuel Filter
- Oil Pump
- Full Flow Oil Filter
- Jacket Water Pump
- Thermostat and Housing
- Exhaust Manifold Dry
- Oil Cooler
- Blower Fan & Fan Drive
- Radiator - Unit Mounted
- Electric Starting Motor 24VDC
- Turbocharged

- Housing & Flywheel
- Charging Alternator 24VDC
- Battery Kit & Battery Rack

### GENERATOR

- Synchronous, Brush-less
- Four Pole
- Single Bearing
- Direct Coupled With Flex
- Class H Insulation
- Drip-Proof Construction

### CONTROL PANEL

- Digital type
- Automatic Mains Failure module provides engine and electrical

metering facilities via the LCD display, accessed via the SCROLL push button

- Ac Voltmeter
- Ac Ammeter
- Frequency Meter
- Vibration Shock Mounts
- Engine Shutdowns
  - \* High Water Temperature
  - \* Low Oil Pressure
- Engine Gauges
  - \* Battery Voltmeter
  - \* Water Temperature
  - \* Oil Pressure

- \* Running Time Meter
- \* LED and LCD alarm indication

### GENERAL

- Steel Skid Base Frame
- Industrial Muffler
- Rain Cap
- Lifting Points
- Acrylic Enamel Paint

# ARMSTRONG POWER SYSTEMS

	Item	Units	Type of Operation and Application	
			60 Hz	
			Prime	Standby
Engine	Rated Speed	rpm	1800	1800
	Gross Engine Output	bhp (kWm)	-	835 (623)
	BMEP	psi (kPa)	-	401.6 (2769)
	Mean Piston Speed	Ft/s (m/s)	32.8 (10)	
Cooling System	Ambient Air Temperature	°F (°C)	131 (55)	
	Coolant Capacity engine only	gal (L)	-	
	Coolant Capacity engine + radiator	gal (L)	15.3 (58)	
	Cooling system		Liquid (50% water + 50% coolant)	
	Pusher Fan Air Flow	ft <sup>3</sup> /min (m <sup>3</sup> /min)	30,582 - (866)	
	Heat rejection to coolant	kcal/kW	-	
	Heat rejection to air (intercooler)	kcal/kW	-	
Fuel system	Fuel Type		Diesel No.2	
	Fuel Consumption @ 50% Power	gal/hr (L/hr)	-	-
	Fuel Consumption @ 75% Power	gal/hr (L/hr)	-	-
	Fuel Consumption @ 100% Power	gal/hr (L/hr)	-	38.6 (146)
Air Requirement	Combustion Air Flow	ft <sup>3</sup> /min (m <sup>3</sup> /min)	-	1483 (42)
	Air Intake Restriction	In.H <sub>2</sub> O (kPa)	14.5 (3.6)	
	Maximum Allowable Restriction	In.H <sub>2</sub> O (kPa)	25 (6.2) - Dirty air filter	
Exhaust System	Exhaust Gas Flow	ft <sup>3</sup> /min (m <sup>3</sup> /min)	-	4237.7 (120)
	Max temperature, after turbo	°F (°C)	-	1022 (550)
	Connection Outlet Size Diameter	In. (mm)	6 (170)	
Lubrication System	Total Engine Oil Cap. w/ Filter(s)	gal (L)	15.8 (60)	
	Oil Filter Type		Cartridge	
	Oil Cooler		Water Cooled	
	Lube oil specifications		API-CI4 - SAE 15W - 40	
	Lube oil consumption		< 0.1 % of full load fuel consumption	
	Oil and filters interval for replacement	hours	Check your engine operators book	
Engine Electricals	Battery Charging Alternator	Volts, Ground	24VDC, Negative	
	Battery Charging Alternator	Rated amps	70	
	Recommended Battery Cold Crank	CCA amps	1200 (0°F / -18°C)	
	Starter Motor	Volts, Ground	24DC, Negative	
Ambient Deration	temperature	%	Consult Factory	
	altitude >	%	Consult Factory	
	altitude >	%	Consult Factory	

## OPTIONAL EQUIPMENT

# A550PE2

### Cooling System

- Remote Radiator
- Jacket Water Heater
- Crankcase Oil Heater

### Fuel System

- Fuel/Water Separator
- Day Tank
- Above Ground Fuel Tank
- Auxiliary Fuel Pump
- Sub-Base Fuel Tank
  - Double Wall
  - UL Listed

### Exhaust System

- Industrial Grade Muffler
- Residential Grade Muffler
- Critical Grade Muffler
- Super Critical Grade Muffler

### Start System

- Battery Nicad
- Battery Warmer Plate
- Battery Charger
  - Automatic Float Equalizing
  - Trickle

### Switchgear

- Main Line Circuit Breaker
  - Shunt trip
  - Auxiliary switch
- Automatic Transfer Switch
- Paralleling
- Protective Relays

### Generator

- Permanent Magnet Excitation
- Space Heaters
- Temperature Rise Detectors


### Control Panel

- Emergency stop button
- Microprocessor Control Panel
- NFPA 110 Ready
- Remote Annunciation Panel
- Audible Alarm

### General

- Spring vibration isolators
- Automatic Transfer Switch
- Metal Enclosure
- Interior lights AC or DC
- Trailer
- Export Packaging
- Special Testing
- Warranties

## DIMENSIONS AND WEIGHT

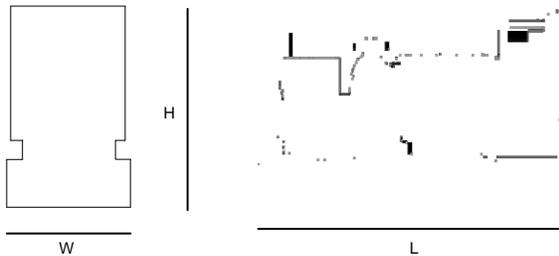

## DIMENSIONS AND WEIGHT

	Units	Open Unit	Sound Att. Unit
Length	In. (mm)	142 (3606)	190 (4826)
Width	In. (mm)	48 (1219)	52 (1320)
Height	In. (mm)	78 (1981)	88 (2235)
Weight	Lbs (kg)	7943 (3598)	8461 (3846)

General configuration for reference only, do not use these dimensions for installation purposes. Contact your local dealer for certified drawings.

All Specifications and Materials are subject to change without prior notice.



**ARMSTRONG POWER SYSTEMS LLC**  
 Phone (305) 470-0058  
 Fax (305) 470-0068  
 Toll Free (800) 238-0732  
 Address: 5100NW 72<sup>nd</sup> Ave., Miami FL 33166  
 Email: sales@armstrongpower.com  
[www.armstrongpower.com](http://www.armstrongpower.com)

